


1516LI / 1516LI-E

Installation Instructions 16 INPUT LOGIC MODULE

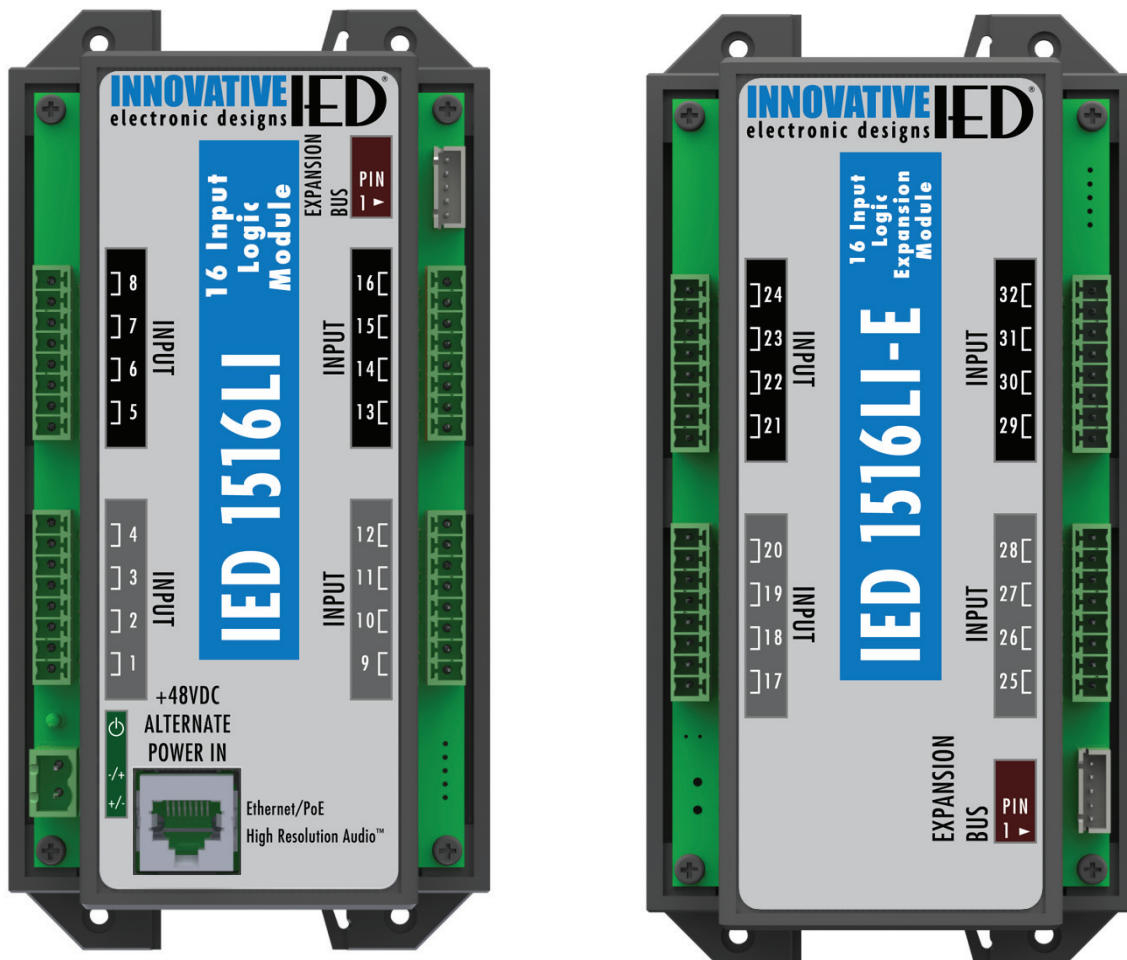

Copyright © 2014 Innovative Electronic Designs, LLC. All Rights Reserved

If this document is distributed with software that includes an end user agreement, this document, as well as the software described in it, is furnished under license and may be used or copied only in accordance with the terms of such license. Except as permitted by any such license, no part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, storage in an information retrieval system, or otherwise, without the prior written permission of Innovative Electronic Designs, LLC. Please note that the content in this guide is protected under copyright law even if it is not distributed with software that includes an end user license agreement.

The content of this document is furnished for informational use only and is subject to change without notice. It should not be construed as a commitment by Innovative Electronic Designs, LLC. Innovative Electronic Designs, LLC assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this document.

Any reference to company names in examples are for demonstration purposes only and are not intended to refer to any actual organization or an endorsement of any kind.

Innovative Electronic Designs, IED, 500ACS Announcement Control System, CAS, Courtesy Announcement System, T-CAS, FAS, Flight Announcement System, IED On Call, IED On Call & Design, and LANcom are all registered trademarks or trademarks of Innovative Electronic Designs, LLC in the United States and/or other countries.

CobraNet is a registered trade mark of Cirrus Logic in the United States and/or other countries.

Microsoft, Windows, Windows Vista, Windows 7, Windows Server, SQL Server, and Internet Explorer are all registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Innovative Electronic Designs, LLC
9701 Taylorsville Road
Louisville, KY 40299
United States of America




www.iedaudio.com

DOC1217B

TABLE OF CONTENTS

IMPORTANT SAFETY INSTRUCTIONS	2
SAFETY SYMBOLS.....	2
SAFETY CONSIDERATIONS	3
SAFETY PRECAUTIONS	3
GENERAL PRECAUTIONS	3
PRELIMINARY PRECAUTIONS	4
PRECAUTIONS WHEN MEASURING HIGH VOLTAGE POTENTIALS.....	4
PRECAUTIONS WHEN WORKING ON ENERGIZED EQUIPMENT.....	5
AC POWER CIRCUITS.....	5
RESUSCITATION	5
DESCRIPTION	5
CONNECTIONS	6
CONNECTIONS (Continued)	7
WALL MOUNTING	8
DIN RAIL MOUNTING.....	9
DIN RAIL MOUNTING (Continued).....	10
REMOVING FROM DIN RAIL MOUNT.....	11
1516LI EXAMPLES	12
ETHERNET/PoE INPUT CONNECTION EXAMPLE	12
48VDC ALTERNATE POWER INPUT CONNECTION EXAMPLE	13
INPUT CONNECTIONS EXAMPLE.....	14
EXPANSION BUS CONNECTION EXAMPLE.....	15
SPECIFICATIONS.....	16
FCC NOTICE.....	17

IMPORTANT SAFETY INSTRUCTIONS

<ol style="list-style-type: none"> 1. Read these instructions. 2. Keep these instructions. 3. Heed all warnings. 4. Follow all instructions. 5. Do not use this apparatus near water. 6. Clean only with dry cloth. 7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions. 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat. 9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet. 10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus. 11. Only use attachments/accessories specified by the manufacturer. 	<ol style="list-style-type: none"> 12.  Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over. 13. Unplug this apparatus during lightning storms or when unused for long periods of time. 14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped. <div data-bbox="889 726 1398 968">  <div data-bbox="1045 730 1247 856"> <p>CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR</p> </div>  <p>TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER (OR BACK) NO USER SERVICEABLE PARTS INSIDE REFER SERVICING TO QUALIFIED PERSONNEL</p> </div>
---	--

WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain, moisture, dripping, splashing, or place objects filled with liquids on the equipment.

AVERTISSEMENT: Afin de réduire le risque d'incendie ou de choc électrique, n'exposez pas cet appareil à la pluie, à l'humidité, à l'égouttement, aux éclaboussures, et ne posez pas des objets remplis de liquide sur l'appareil.

WARNING: If apparatus is equipped with Class I grounding plugs for safety purposes, it must be connected to MAINS that employ a protective earth ground connection.

AVERTISSEMENT: si l'appareil est équipé de prises de terre classe I, pour des raisons de sécurité, il doit être branché sur un réseau ayant une prise de terre de protection.

WARNING: The MAINS plug on this device may be used as the DISCONNECT DEVICE for MAINS power and must remain readily operable.

AVERTISSEMENT: La prise principale de cet appareil peut être utilisé comme DISPOSITIF de DECONNEXION du courant principal et doit rester facilement accessible.

WARNING: Installation and maintenance of IED equipment is to be made by trained/qualified personnel and must conform to all applicable local codes.

AVERTISSEMENT: l'installation et la maintenance des équipements IED doit être faite par du personnel formé / qualifié et doivent être conformes à toutes les réglementations locales en vigueur.

WARNING: If unit contains a lithium battery, there is a danger of explosion. Replace only with the same or equivalent type.

AVERTISSEMENT: Si l'unité contient une pile au lithium, il y a un danger d'explosion. Remplacez-la uniquement avec un modèle identique ou équivalent.

SAFETY SYMBOLS

Labeling on products and the *Installation Instructions & User Manual* may use safety related graphical symbols as shown below to note safety requirements.



Lightning Bolt: The lightning flash with arrowhead symbol, within an equilateral triangle, WARNING symbol, is intended to alert the user to the presence of uninsulated **dangerous voltage** within the product's enclosure that may be sufficient in magnitude to constitute a risk of electric shock to persons or domestic animals.



Exclamation Point: The exclamation point within an equilateral triangle, CAUTION symbol, is intended to alert the user to the presence of important operating and maintenance (servicing) instructions, or a hazard that can damage equipment.



Do not proceed beyond a WARNING or CAUTION notice until you have understood the hazardous condition and have taken appropriate steps.

Ne continuez pas avant d'avoir pris connaissance du danger et prendre les mesures appropriées.

SAFETY CONSIDERATIONS

SAFETY PRECAUTIONS

Personnel properly qualified in the application and use of life safety equipment ("qualified personnel") shall read this manual carefully before performing any actions to specify, apply, install, maintain and perform operational tests of IED systems, and associated products in accordance with the instructions in this manual. This manual shall be made available to all qualified personnel who operate, test, maintain, or service IED systems, and associated products. It is strongly recommend that such personnel read and understand the entire manual.

WARNING: IF SAFETY PRECAUTIONS, INSTALLATION AND TESTING ARE NOT PERFORMED PROPERLY, CONDITIONS COULD EXIST IN WHICH THE IED SYSTEM MAY NOT OPERATE, OR MAY OPERATE IMPROPERLY. THIS COULD RESULT IN PROPERTY DAMAGE AND SERIOUS INJURY OR DEATH TO YOU AND/OR OTHERS.

AVERTISSEMENT: SI LES MESURES DE SECURITE, L'INSTALLATION ET LES ESSAIS NE SONT PAS EFFECTUES CORRECTEMENT, CELA POURRAIT EMPECHER LE SYSTÈME IED DE FONCTIONNER, OU DE FONCTIONNER CORRECTEMENT. CELA POURRAIT PROVOQUER DES DEGATS MATERIELS ET DES BLESSURES GRAVES, OU LA MORT POUR LES AUTRES ET/OU VOUS-MEMES.

It is very important that only responsible, trained personnel are allowed to operate and maintain these systems, and that they use only appropriate equipment and tools. If a person is not trained, they shall contact the IED factory for direction on how to operate and maintain an IED system.

Unauthorized personnel and equipment must be restricted from the areas of operation.

All operations should be performed carefully, methodically, and without hurrying. Greater effectiveness will be developed by increased familiarity of personnel with their assignments. During any maintenance operation, if a malfunction occurs or an incorrect indication appears, stop the operation and determine whether or not it is safe to proceed. Before performing any step in a procedure, be sure that the preceding step has been properly executed and correct results obtained. Cleanliness and good housekeeping in all installation areas are major factors in effective accident prevention. Tools and equipment should be maintained in good working order and should always be returned to their proper storage place after usage. Cleaning agents and other cleaning aids should be removed from the equipment areas immediately upon completing the task at hand.

GENERAL PRECAUTIONS

Changes, modifications, or additions in connection with the IED system equipment shall not be made without explicit authorization of IED.

Safety devices found on mechanical, and electrical and electronic equipment are put there for the protection of personnel and equipment. These devices must be maintained in good working order and operative at all times. Safety devices shall never be removed or bypassed unless specifically authorized by the IED factory. Where safety devices have been rendered inoperable by proper and specific authorization, adequate notices shall be posted to warn personnel of the potential hazard.

Avoid the use of flammable or toxic cleaning fluids, and the use of carbon tetrachloride is prohibited.

Maintenance of the equipment shall be at least what is specified in the IED manuals and literature, and performed only by qualified personnel.

Whenever operation and maintenance is ongoing, personnel in the equipment areas shall have an effective communication among these areas in order to protect people if any accident occurs.

PRELIMINARY PRECAUTIONS

Precautions which are applicable to general electrical or electronic maintenance are as follows:

- a. Check yourself. Wear no article that might catch on equipment or that might act as a conductor.
- b. Check the working area. The equipment area shall be clean and dry. If possible, stand on a special insulator such as a rubber mat. There should be ample working space and good lighting.
- c. Check the tools. Always use proper tools and check them for their safe condition. Use screwdrivers with plastic handles. Check test equipment periodically and examine test leads carefully as the slightest break in insulation is dangerous.
- d. Check the procedures. Study the entire procedure before taking the first step. Consult the circuit diagram frequently to obtain an understanding of what is accomplished at each step. Know what is in the equipment and how it differs from others on which you have worked.
- e. Be aware that high voltages may be present across terminals that are normally low voltage, due to equipment breakdown. Be careful when measuring low voltages in equipment containing high voltage circuits.
- f. Do not make resistance measurements with power on.
- g. Do not work within the equipment without the presence of a person who is capable of rendering aid, and who is familiar with the procedure for emergency shutdown of the equipment.

PRECAUTIONS WHEN MEASURING HIGH VOLTAGE POTENTIALS

Observe the following precautions when measurements must be performed on circuits with potentials over 48 volts.

- a. Do not measure potentials over 48 volts without the presence or assistance of a person who is capable of rendering aid, and who is familiar with the procedure for emergency shutdown of the equipment.
- b. Be sure you are not grounded when you are adjusting equipment or using measuring equipment. Stand on a rubber mat or other insulator if possible. Be sure the equipment area is clean and dry. In general, use only one hand when servicing live equipment.
- c. If a test meter must be held or adjusted while voltage is applied, ground the case of the meter before starting a measurement. Do not touch the live equipment or personnel working on live equipment while holding the meter. The "common" terminal on some A/C electronic voltmeters is at ground potential; never connect the "common" terminal to any point above ground potential.
- d. High-voltage, high-capacitance capacitors should be discharged before servicing is started.



WARNING! Discharging must be done carefully and judiciously. First ascertain whether there is a built-in bleeder network. If so, wait a minute or two for the capacitor to discharge through the network. Otherwise, use an external discharge network. This is most important in the case of high voltage or high capacitance capacitors. If one terminal is connected to ground, connect the discharge network between the other terminal and ground. If neither terminal of the capacitor is grounded, connect the network across the capacitor terminals. Connecting a short circuit across the terminals is not recommended. Doing so can produce extremely high currents and a flash which can injure the eyes, vaporize metals, and cause burns.



AVERTISSEMENT: La décharge doit être faite soigneusement et judicieusement. Vérifier d'abord si il y a un réseau de purgeur incorporé. Si c'est le cas, attendez une minute ou deux pour que le condensateur se décharge par le réseau. Sinon, utilisez un réseau de décharge externe. Ceci est très important en cas de haute tension ou des condensateurs à haute capacité. Si un terminal est relié à la terre, connecter le réseau de décharge entre l'autre terminal et la terre. Si aucun terminal de condensateur est fondé, relier le réseau au terminal du condensateur. La connexion d'un

court-circuit entre les terminaux n'est pas recommandée. Cela peut créer des courants très élevés où des étincelles pourraient blesser les yeux, fondre les métaux et causer des brûlures.

PRECAUTIONS WHEN WORKING ON ENERGIZED EQUIPMENT

When it is necessary to work on energized equipment, think ahead and anticipate every hazard. Never work alone on energized equipment.

Interlock switches are installed on some of the doors and panels to break the power circuits when the enclosure is entered. When it is necessary to work within such an enclosure on energized equipment, the interlock may be bypassed. Extreme caution should then be exercised, as dangerous voltages are present within the unit.

AC POWER CIRCUITS

Equipment obtaining power from a secondary distribution system should be grounded at all times by means of a third grounding wire on the power lines. Equipment permanently wired to a secondary distribution system should also be grounded separately by connection to a grounding bus or ground rod with a sufficiently large conductor to handle the current expected if the secondary source is accidentally shorted to the equipment.

The ground wire should be protected from mechanical damage and periodically inspected for good physical condition.

Personnel should never depend on a switch to remove power from equipment. If the equipment is connected to the secondary distribution system by means of a power cable, detach the cable from the receptacle before attempting any repairs or removal of chassis.

If the equipment is permanently wired to the secondary distribution system, remove the main fuses or open the power switch. Attach a suitable warning tag to the switch which will warn personnel not to operate the equipment; only the person who originally attaches the warning tag should be authorized to remove it.

RESUSCITATION

Personnel working with or near high voltage should be familiar with modern methods of resuscitation. Such information and training is available from the Red Cross or local emergency response personnel such as the police and fire departments.

DESCRIPTION

The 1516LI is a network logic input device used to interface with an IED GLOBALCOM announcement control system. It provides 16 optically-isolated inputs that can be driven using dry contact closures or 0 to 50VDC logic signals. A green LED is provided above each input that illuminates when activated. The announcement controller is configured using the GLOBALCOM System Management Center software where logic inputs can be used to launch announcements, pre-recorded messages, events, or fault reports.

The 1516LI-E is a 16 input expansion module that connects directly to a 1516LI to bring its total input capacity up to 32 inputs.

The device receives its power over IEEE 802.3af Power over Ethernet (PoE) and communicates with other system devices over the Ethernet network. The maximum power consumption from the PoE switch is 4 watts if the 1516LI-E is used. If the expansion unit is not used, the maximum power consumption is 3 watts. If PoE equipment is not available, an input is provided for an alternate 48VDC power supply. A green LED is provided to show that the unit is powered on. The 1516LI-E receives its power through its connection to the 1516LI.

The 1516LI and 1516LI-E are provided in an enclosure that either mounts to a DIN rail or is screwed down on a panel or wall to allow for convenient installation close to the signaling sources. The 1516LI-E connects to the 1516LI through the supplied 5-conductor expansion cable.

CONNECTIONS

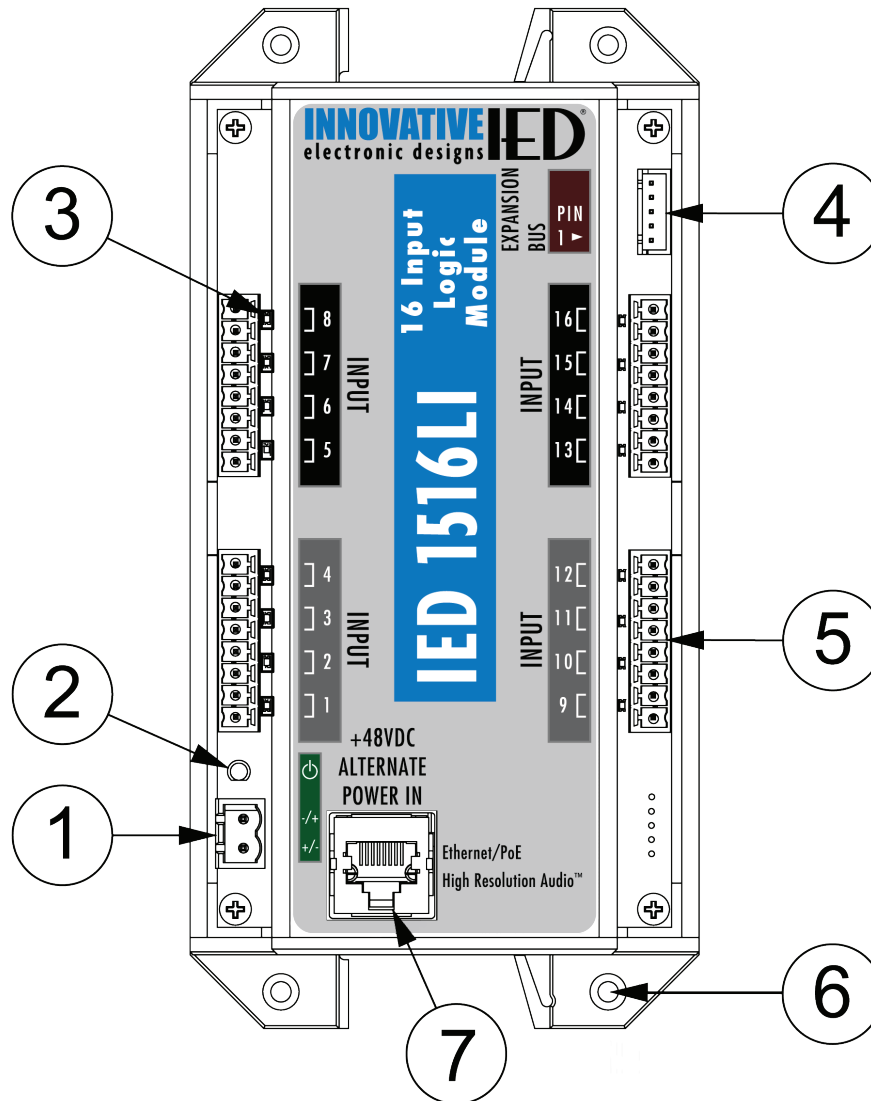


Figure 1 - Front View - 1516LI Connections

1. 48VDC Alternate Power Input Connector
2. Power LED
3. Logic Input Active LEDs
4. Expansion Bus Connector
5. Logic Input Connectors
6. Optional Screw Mounting Locations
7. Ethernet/PoE Connector

CONNECTIONS (Continued)

1. 48VDC Alternate Power Input Connector

When PoE is not used, an external DC supply can be used to supply power to the 1516LI.

2. Power LED

This LED will illuminate when the unit is powered on.

3. Logic Input Active LEDs

The Logic Input LEDs will illuminate when activated.

4. Expansion Bus Connector

The Expansion Bus Connector is connected using the supplied 5-pin, 2.50 mm spacing plugs.

5. Logic Input Connectors

The Logic Input Connectors are connected using the supplied 8-pin, 3.81 mm spacing Phoenix plugs. Ensure that the proper polarity is maintained throughout all terminations.

6. Optional Screw Mounting Locations

There are 4 optional screw mounting locations and up to a size 6 screw can be used.

7. Ethernet/PoE Connector

The Ethernet PoE connector is used to connect the unit to the network using a standard RJ-45 (Cat 5e or higher, 100BaseTX cable) connector.

WALL MOUNTING

After unpacking the 1516LI from its shipping carton, install four screws securely in the designated areas. Screw size can be up to a size 6.



Figure 2 - Wall Mounting with Screws

DIN RAIL MOUNTING

STEP 1: Position the tabs on the right side flanges under the lip of the DIN rail.

STEP 2: Rotate the 1516LI to the left until it snaps into place.

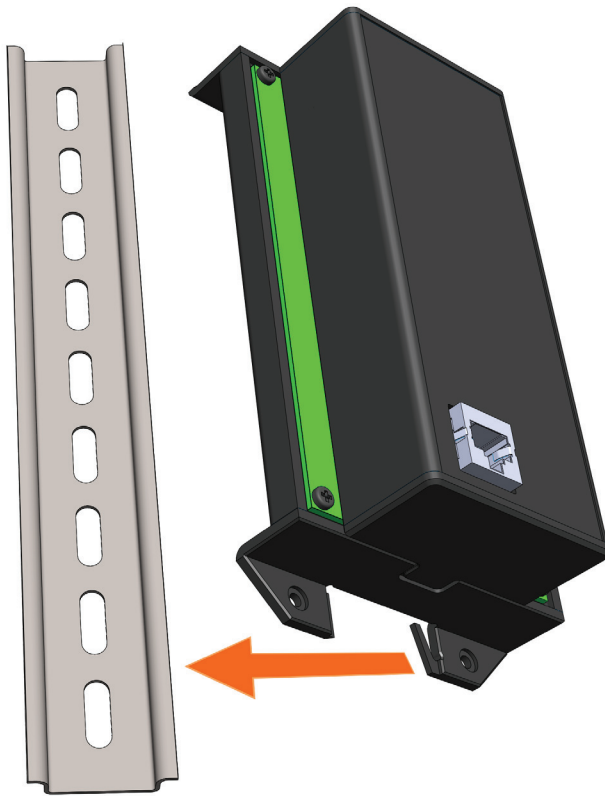


Figure 3 - 1516LI Mounting on the DIN Rail Example



Figure 4 - 1516LI Rotating and Snapping into Place Example

DIN RAIL MOUNTING (Continued)

The figure below depicts the completed DIN rail mounted option.

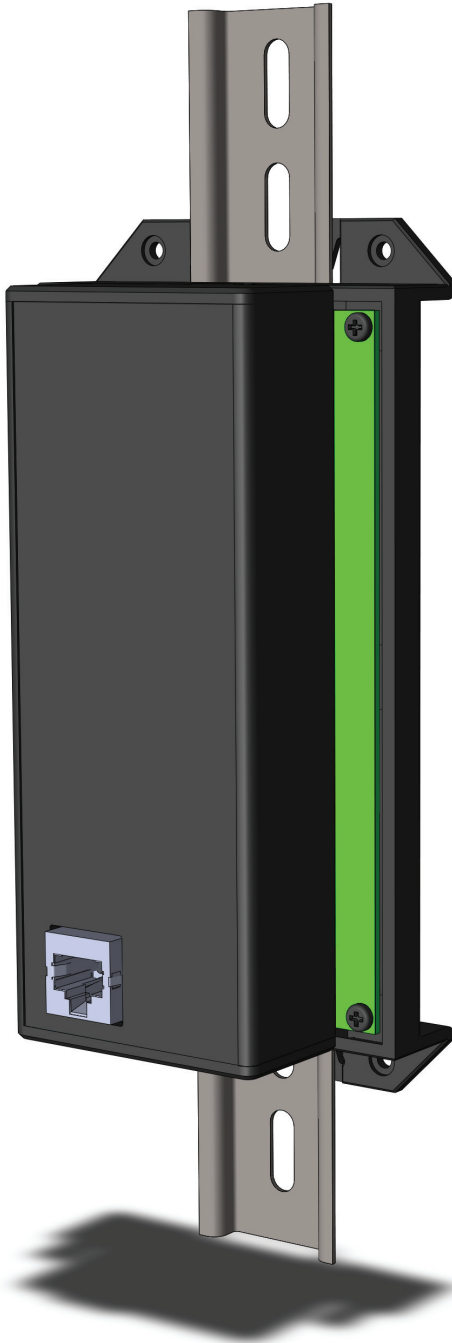


Figure 5 - 1516LI - Din Rail Mounted Example

REMOVING FROM DIN RAIL MOUNT

STEP 1: Push the 1516LI in from the right side, and rotate the unit to the right and pull away from the DIN rail.



Figure 6 - 1516LI Removing from DIN Rail Example

1516LI EXAMPLES

ETHERNET/PoE INPUT CONNECTION EXAMPLE

The Ethernet/PoE Input connection cable should be an RJ-45 (Category 5e or higher, 100BaseTX cable) with or without PoE power that conforms to IEEE 802.3af.

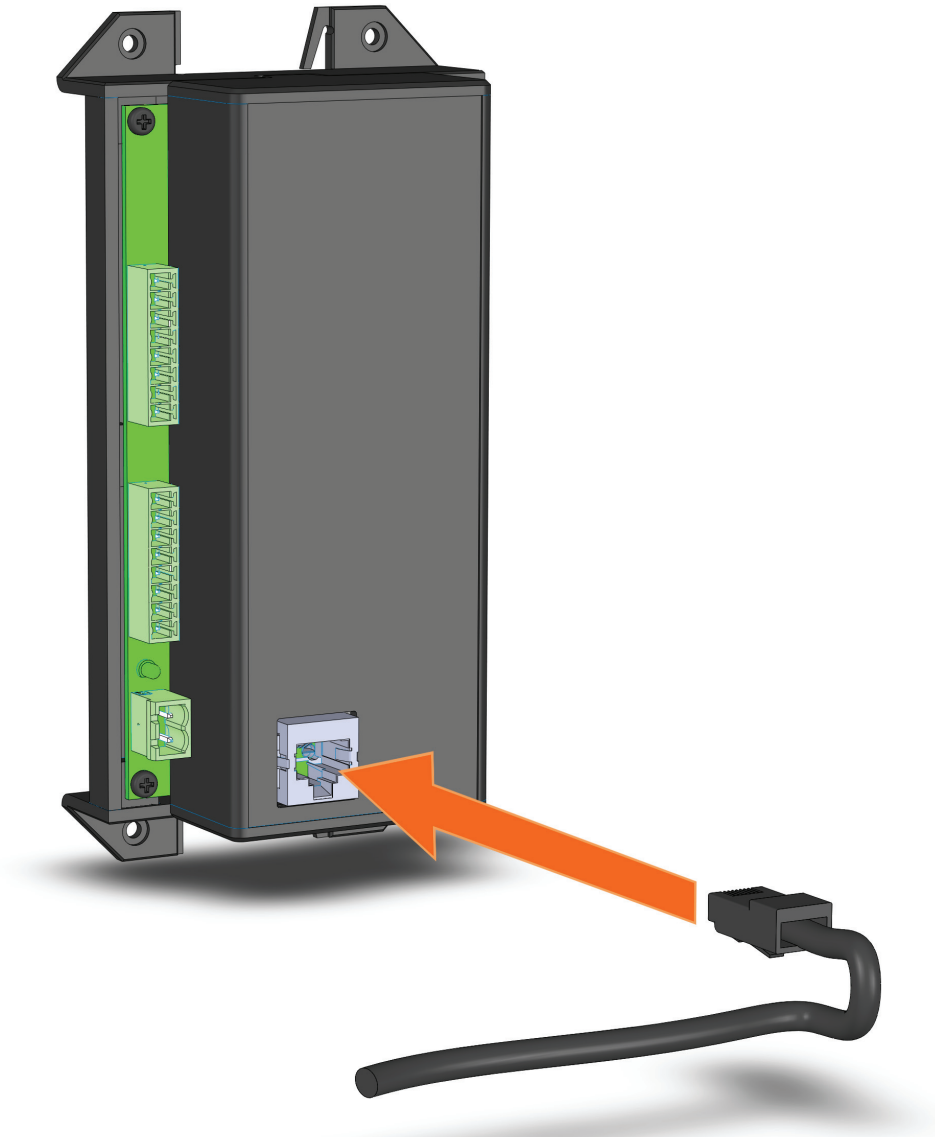


Figure 7 - 1516LI Ethernet/PoE Input Connection Example

48VDC ALTERNATE POWER INPUT CONNECTION EXAMPLE

When PoE is not used, an external DC supply can be used to supply power to the 1516LI. The 48VDC connection has no polarity and therefore, plus and minus may be in either orientation.

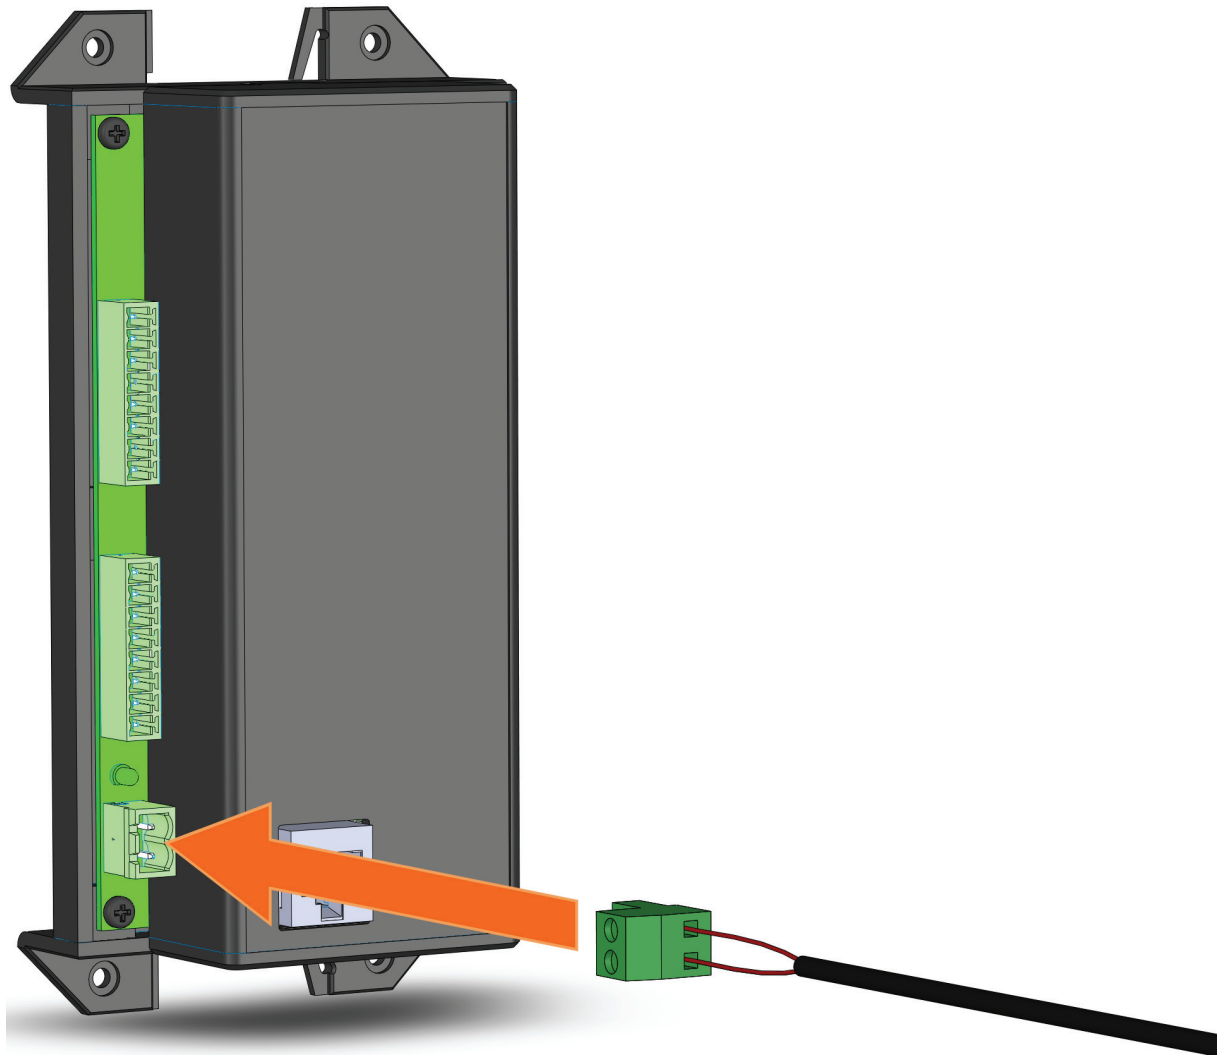


Figure 8 - 1516LI Optional 48VDC Alternate Power Input Connection Example

INPUT CONNECTIONS EXAMPLE

The Logic Input Connectors are connected using the supplied 8-pin, 3.81 mm spacing Phoenix plugs. Ensure that the proper polarity is maintained throughout all terminations.

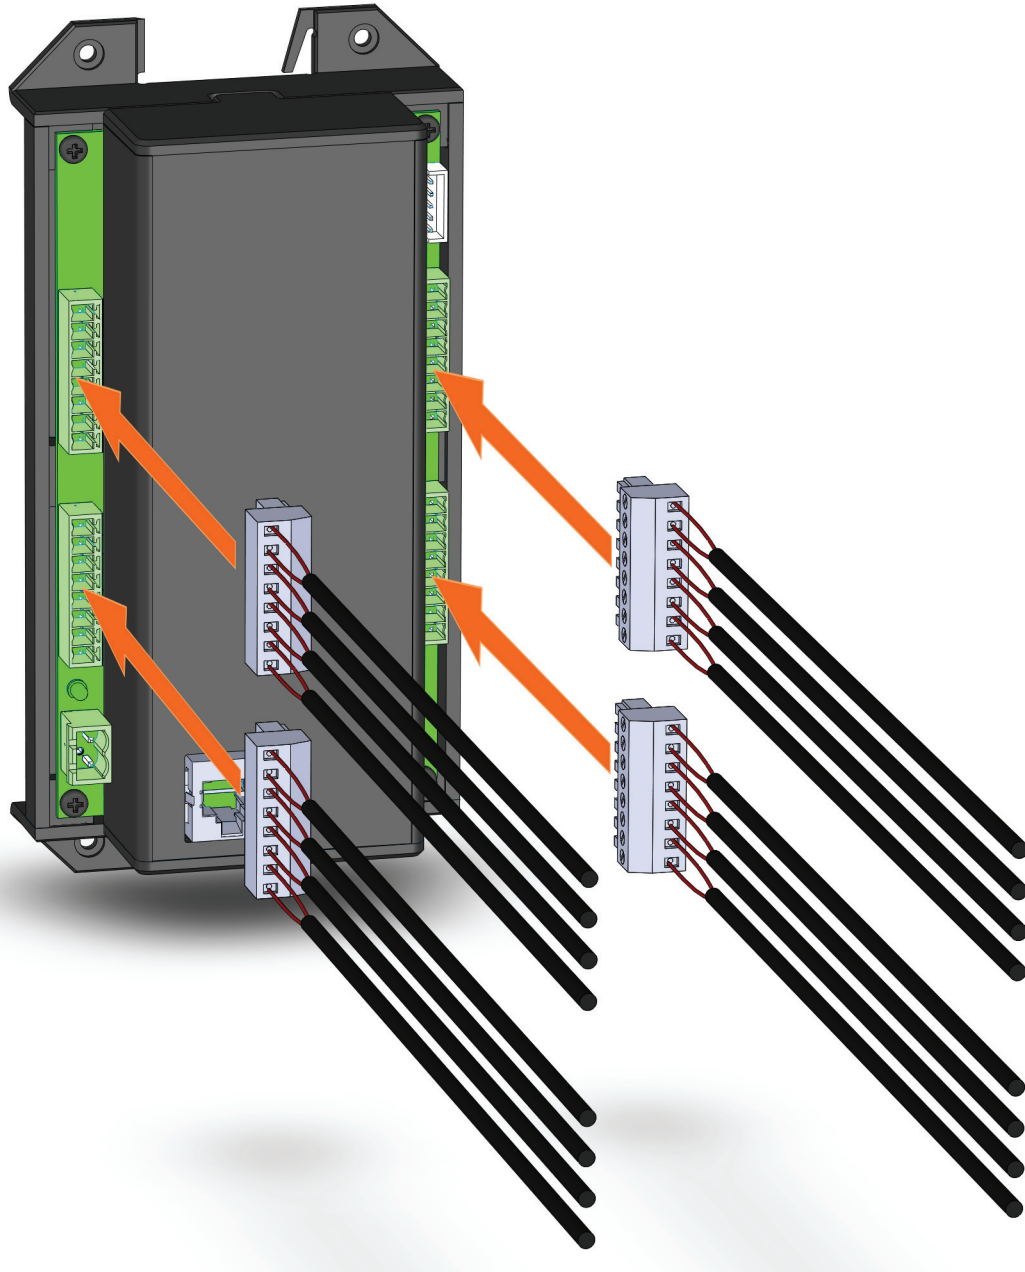


Figure 9 - 1516LI Input Connections Example

EXPANSION BUS CONNECTION EXAMPLE

The 1516LI and the 1516LI-E connect using the supplied 5-pin, 2.50 mm spacing plugs. Ensure that the proper polarity is maintained throughout all terminations. This will allow the total input capacity up to 32 inputs.

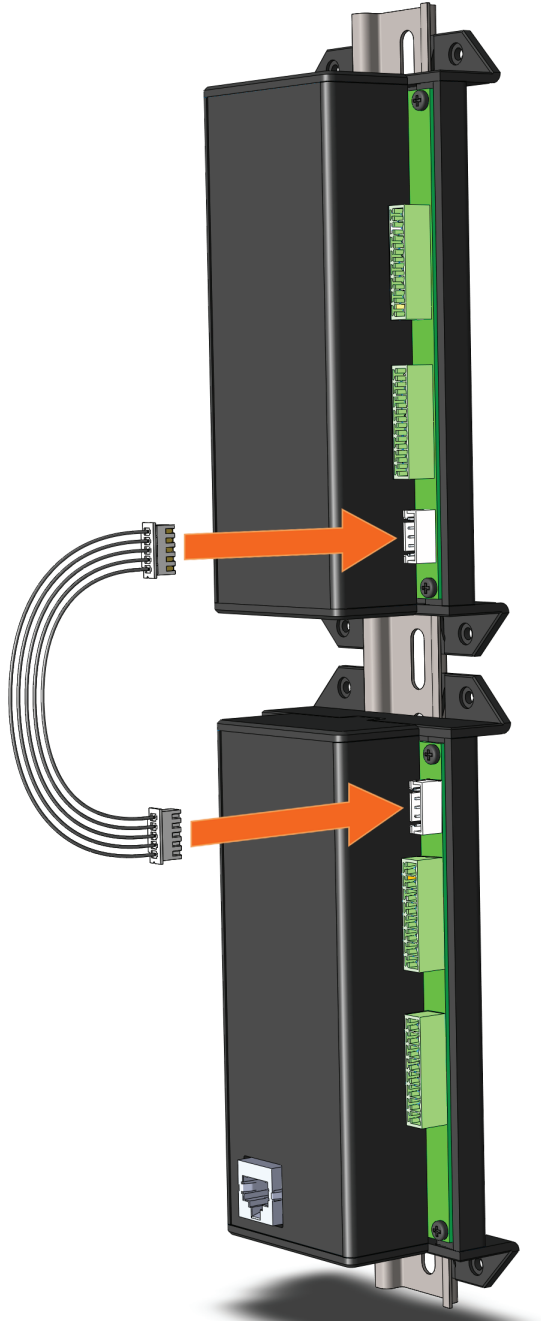


Figure 10 - 1516LI TO 1516LI-E Expansion Bus Connection Example

SPECIFICATIONS

Part Numbers

IED1516LI
IED1516LI-E

Electrical

Optically Isolated Inputs
Voltage Range 0 – 1.6VDC (ON) / 1.7 – 50VDC (OFF)
Max Current 3 mA source / 160 mA sink
Minimum Hold Time (high or low) 250 ms

Power Requirements

Input Voltage 48VDC (PoE Compliant with IEEE 802.3af)
Power 1516LI 3 Watts max
Power 1516LI-E 1 Watt max
Optional 48VDC Alternate Power Input Voltage 40 - 50VDC

Indicator

Power LED 1 (Green)
Input Active LEDs 16 (Green)

Connectors

Inputs (4) 8-pin Phoenix, 3.81 mm spacing
Ethernet/PoE RJ-45 (Cat 5e or higher, 100BaseTX cable)
48VDC Alternate Power Input 2-pin Phoenix, 5.08 mm spacing
Expansion Bus 5-pin Connector, 2.50 mm spacing

Mechanical

Height 7.01" (17.81 cm)
Width 3.50" (8.90 cm)
Depth 2.00" (5.08 cm)
Weight 7.3 oz (206.9 g)

Environmental

Operating Temperature Range -22 °F – +149 °F (-30 °C – +65 °C)

FCC NOTICE

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense