

VPCS Series


Vandal Proof Intercom Stations With Cone Loudspeaker



VPCS-2GPB-2



VPB-1A

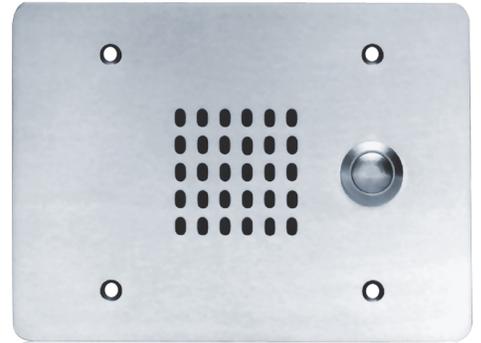

VPCS-3GPB-245

Features

- Shallow Depth of 2 1/8" (54mm) for Mounting in Standard 2 & 3-Gang Back Boxes
- Moisture-Resistant 2 1/2" (64mm) Diameter Cone Loudspeaker
- Offers Smooth Loudspeaker Response with High Output in the Speech Range
- Two-Piece Die-Cast Baffle System Protects the Loudspeaker Assembly from Vandalism
- Choice of Basic or Call Switch Equipped Models
- Unit Design Facilitates Quick and Easy Service Procedures
- Transformer Models Include 1/4, 1/2, 1, and 2 Watt Taps at 25V
- Durable 11-Gauge, Stainless Steel Face Plate

Applications

Atlas-Sound's VPCS Series 2 & 3-gang intercom systems provide superior intelligibility for one or two-way communication in high-security applications. Units are designed for installation in detention, correctional, and institutional facilities. VPCS intercom stations are also ideal for use in high-risk public-access spaces such as hallways, lobbies, and parking garages. Units withstand abuse, moisture, corrosion, dust, vibration, and temperature extremes from -4° to 131° F.

General Description

Stations are equipped with a 2 1/2" (64mm) diameter loudspeaker to deliver clear voice and signal transmission while the phenolic resin impregnated, moisture-proof cloth cone provides durable performance. The VPCS Series includes two die-cast baffles to protect the loudspeaker assembly from vandalism. The Series is available with a 25V transformer providing 1/4, 1/2, 1, and 2 watt taps or as a 45Ω configuration.

Model numbers indicating "PB" include a vandal-proof push-button call switch for installation where call origination is a required function or a desired adjunct to security. "PB" models feature a heavy-duty, momentary action push-button with a 3A at 120VAC/1.5A at 250VAC contact rating, mounted to an 11-gauge stainless steel face plate. The face plate mounts standard 2 &/or 3-gang E.O. boxes with any counter sunk 6-32" mounting screw. Lead wires are 5" (127mm). Switch is single pole, single throw, normally open. Pushbutton assembly is constructed of nickel plated brass and sealed against moisture with a classification of IP65.

VPB-1A is a vandal-resistant pushswitch intercom accessory mounted to a single gang size stainless steel plate. Utilize assembly in conjunction with VPCS 2- and 3-gang stations or as a stand alone signaling device when a separate or remotely located call origination button is desired.

VPCS-2G-2	
Description	25V; 2-gang
Speaker Size	2 ½" (64mm)
Cone Material	Phenolic Impregnated Cloth
Power Handling	5 Watts
Sensitivity (1W/1M)	88dB (Measured @ 1 watt / 1 meter) 92.4dB 2000Hz Octave Band
Nominal Impedance	45Ω
Frequency Response	350Hz-4500Hz (±6dB)
Transformer	25V
Transformer Taps	¼, ½, 1, and 2 Watts
Length	4 ¾" (121mm)
Width	4 ¾" (121mm)
Depth	2 ⅞" (54mm)
Weight	1.58 lbs. (.72kg)
VPCS-2GPB-2	
Description	25V; 2-gang w/ call Switch
Speaker Size	2 ½" (64mm)
Cone Material	Phenolic Impregnated Cloth
Power Handling	5 Watts
Sensitivity (1W/1M)	88dB (Measured @ 1 watt / 1 meter) 92.4dB 2000Hz Octave Band
Nominal Impedance	45Ω
Frequency Response	350Hz-4500Hz (±6dB)
Transformer	25V
Transformer Taps	¼, ½, 1, and 2 Watts
Length	4 ¾" (121mm)
Width	4 ¾" (121mm)
Depth	2 ⅞" (54mm)
Weight	1.60 lbs. (.73kg)

VPCS-3GPB-245	
Description	25V; 3-gang w/ call Switch
Speaker Size	2 1/2" (64mm)
Cone Material	Phenolic Impregnated Cloth
Power Handling	5 Watts
Sensitivity (1W/1M)	88dB (Measured @ 1 watt / 1 meter) 92.4dB 2000Hz Octave Band
Nominal Impedance	45Ω
Frequency Response	350Hz-4500Hz (±6dB)
Transformer	25V
Transformer Taps	1/4, 1/2, 1, and 2 Watts
Length	6 3/8" (162mm)
Width	4 3/4" (121mm)
Depth	2 1/8" (54mm)
Weight	1.72 lbs. (.78kg)
VPB-1A	
Description	Plate Mounted 1-gang Call switch
Monetary Push Button	3A 120VAC/1.5A 250VAC NO (Normally Open)
Length	4 1/2" (114mm)
Width	2 3/8" (70mm)
Depth	1 3/8" (35mm)
Weight	.48 lbs. (.22kg)

©2022 Atlas Sound L.P. The Atlas "Circle-A", Soundolier, and Atlas Sound are trademarks of Atlas Sound L.P. IED is a Registered Trademark of Innovative Electronic Designs LLC. All rights reserved.
 All other Trademarks are property of their respective owners. No endorsement is implied. Due to continual product development, specifications are subject to change without notice. ATSO04609 RevB 9/22

Architect and Engineer Specifications

Vandal-proof intercom loudspeaker(s) shall be Atlas Sound VPCS Series Model _____ (VPCS-2G-2, VPCS-2GPB-2, VPCS-3GPB-245) or approved equal. Station(s) shall be comprised of a 5 Watt, 2 1/2" diameter loudspeaker with phenolic, impregnated cloth cone protected by aluminum baffles. The loudspeaker shall be mounted to an 11-gauge stainless steel face plate. Assembly shall be able to withstand damage caused from abuse, moisture, corrosion, dust, vibration and temperature extremes from -4° to 131° F. Unit shall have a sensitivity level of 88dB (1W/1m) with an output in the 2000Hz octave band of 92dB.

Loudspeaker impedance shall be 45Ω. Frequency response range shall be 350 Hz-4500 Hz. Station(s) equipped with call switch (PB models) shall include a vandal-proof, flush-mounted momentary action pushbutton switch with a contact rating of 3A at 120VAC and 1.5A at 250VAC. Stations equipped with a 25V transformers shall have 1/4, 1/2, 1, and 2 Watt taps. VPCS vandal-proof stations shall feature a shallow depth of 2 1/8" which will allow it to mount in standard E.O. boxes. The face plate shall attached with any counter sunk (4) 6-32" mounting screws (not included). Two-gang VPCS intercom stations shall have dimensions of 4 3/4" square x 2 1/8"D (121 x 121 x 54mm). The 3-gang models shall measure 6 3/8" W x 4 3/4" H x 2 1/8"D (162 x 121 x 54mm). VPB-1A dimensions are 4 1/2"H x 2 3/4"W x 1 3/8"D (114 x 70 x 35mm).