

Configuring Phonerlite Softphone As a GCK Internal Extension

Phonerlite is a free SIP softphone which can be installed on any Windows XP or later PC having a mic and speakers. It can be used as an internal extension on a GCK system.

Instructions

- A. Download the latest release version of the softphone from http://phonerlite.de/download_en.htm and install.
- B. Run the softphone. It will start at Setup Wizard Screen 1.

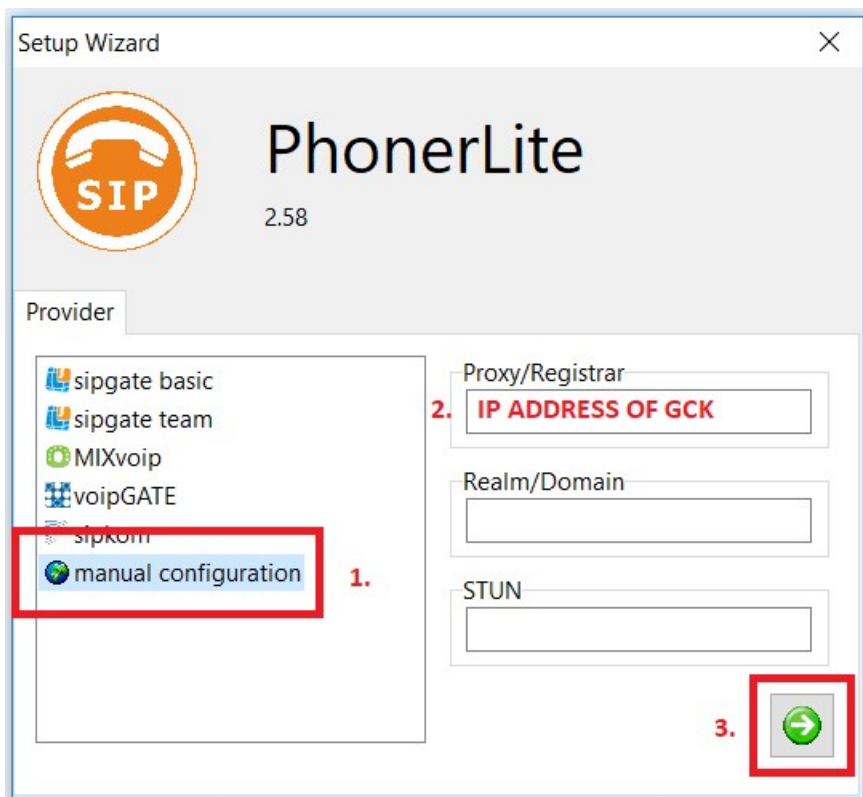


Figure 1 - Setup Wizard Screen 1

1. Select manual configuration.
2. Enter the IP Address of the GCK controller.
3. Click the Next button.

C. In will proceed to Setup Wizard Screen 2.

Setup Wizard

PhonerLite
2.58

User data

User name
222 1.
222@1.2.3.4

Authentication name
222 2.

Password
... 3.

4.
Back Next

Figure 2 - Setup Wizard Screen 2

1. Enter the user name, here shown as 222.
2. Enter the authentication name, here shown as 222.
3. Enter the password. 222 was entered here. Phonerlite obscures password data.
4. Click the Next button.

- D. It will proceed to Setup Wizard Screen 3. Note that “1.2.3.4” was entered as the IP Address of the GCK Controller in Step B.

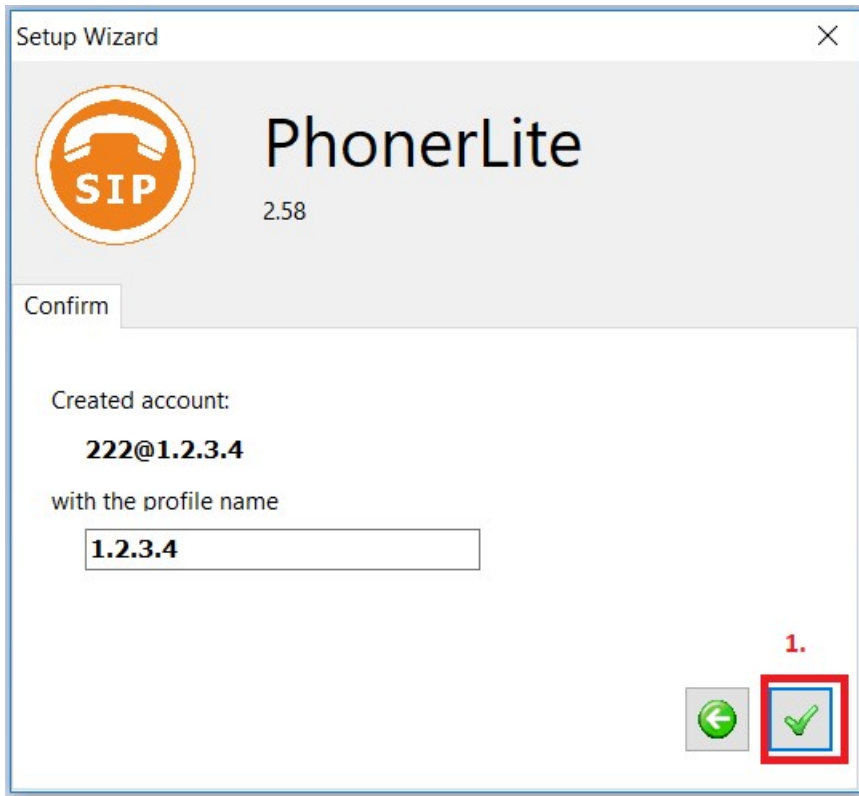


Figure 3 - Setup Wizard Screen 3

1. Click the Next button.

E. It will proceed to the Phonerlite main screen.

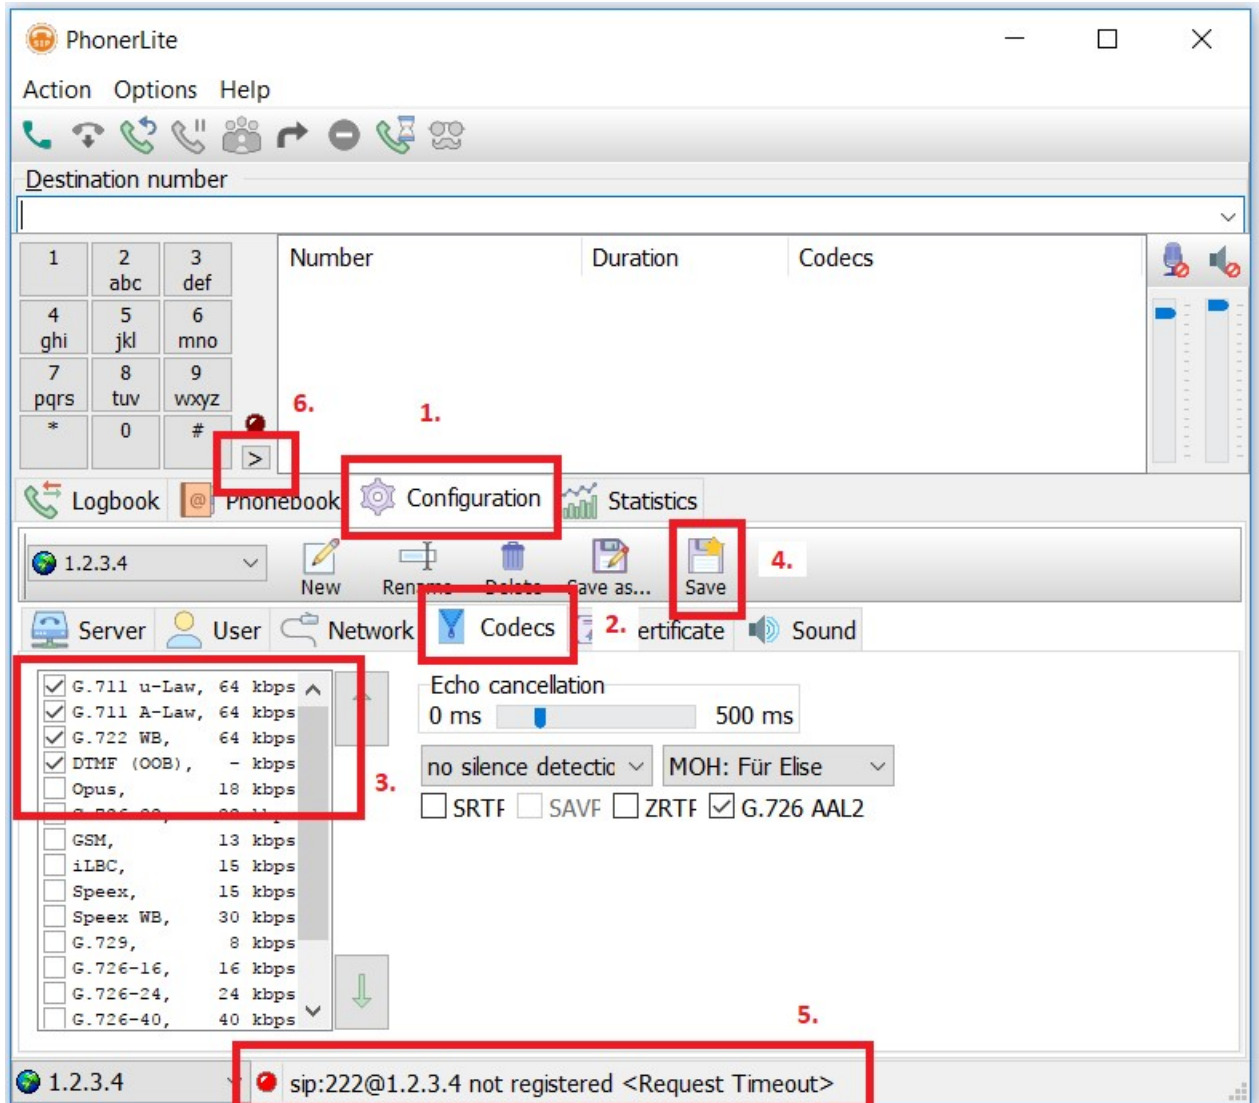


Figure 4 - Phonerlite Main Screen

1. Click the Configuration tab.
2. Click the Codecs sub-tab.
3. Check, uncheck and re-order codecs to form the order shown. The only selected codecs should be the four visible in the listbox in Figure 4.
4. Click the save button.
5. The red indicator should begin blinking. The text should say “Registering”. When the registration process is completed, the red indicator will turn green. The text will say “Registered.”
6. A call can now be made to the GCK Direct Action or Prompting Extensions. Click the numbers to enter the destination extension. Click the “>” button to dial. Alternatively, number keys on the keyboard and the Enter key may be used.