


Call Center Single Zone Masking System


Application Example Featuring M1000A35 Powered Masking Speaker & Commissioning Level Controller

M1000A35 Powered Masking Speaker



ATMASKSC Remote 1dB Step Commissioning - Level Control (Optional)

1-Gang Stainless Steel Wall plate with 0dB to -9dB @ 1dB steps (It will not turn Masking OFF)

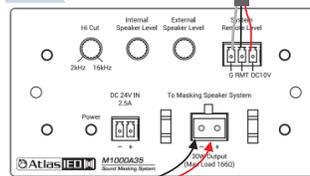


QTY 8 – Passive M1000's @ 1W ea


M1000 Masking speakers are typically hung about 6" above the ceiling grid, firing upwards, no further than 15' apart. (Optional MCHAIN72 hanging chain are available on AtlasIED.COM)

Tech Note:

1 x M1000A35 = 225 Sq Ft coverage & 28 M1000's can cover approximately 6,300 Sq Ft for a total of 6525 Sq Ft in a typical CAC 35 rated ceiling @ 9' gridline and 3-4' depth plenum.

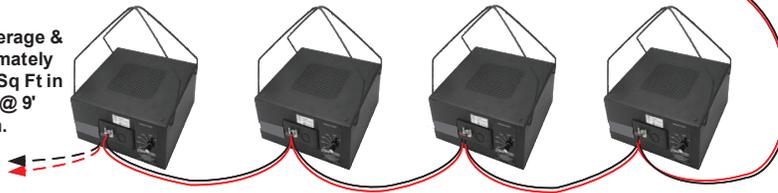

1 x M1000A35 Powered Masking Speaker

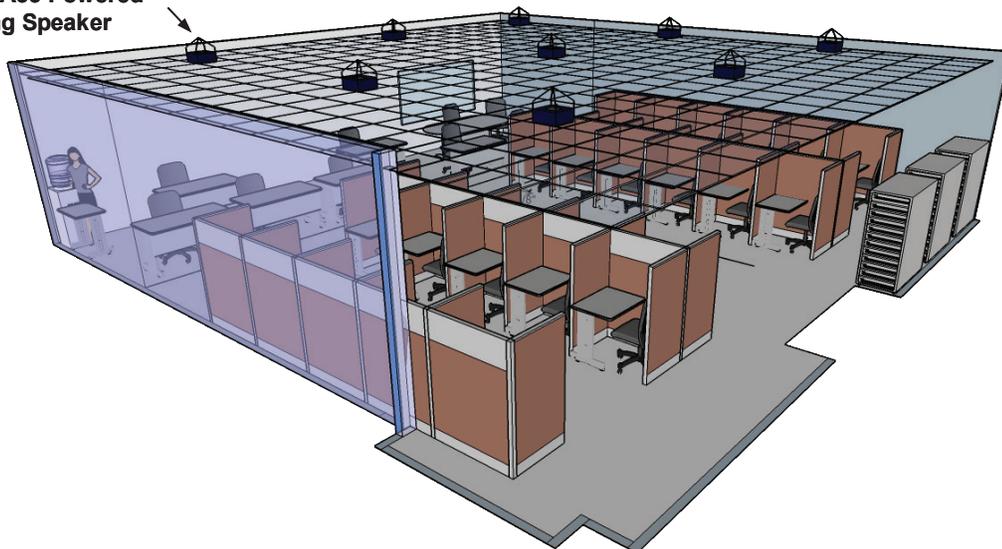

This is a design concept and is not meant to be a fully engineered system design. Contact AtlasIED for system design help.