

Description


The 1100DCI Device Control Interface is an expansion unit used in a GLOBALCOM system to provide a remote control interface method to networked output devices. The 1100DCI hosts an interface server that provides direct access to control program selection, background music (BGM) selection, and output levels in real time using mobile devices. An iOS, Android, Windows Mobile, or any device with a compatible web browser that is allowed to connect to the system network can be used to control output devices such as the DNA and Titan series amplifiers, 1502AO audio output module, or T9116 zone output processor.

The 1100DCI provides two different options for interaction. A built-in web server hosts a web page that can be accessed from the web browser installed on a mobile device, or any computer on the same network. Also, the control commands available through the 1100DCI can be accessed directly through HTTP commands. This provides an interface channel for external control systems such as Crestron® or AMX®.

User access is restricted through the use of passwords. An administrative level of password is available to allow the configuration of various system-wide parameters. The Device Control Interface is configured through its own web page and interacts with the system's controllers through a data service.

Features

- Control of program source, background music selection, and levels for IED networked output devices
- Provides an interface between the GLOBALCOM system and mobile devices or external control systems
- Interfaces directly to GLOBALCOM announcement controllers
- Configuration is completed using the built-in administration web pages

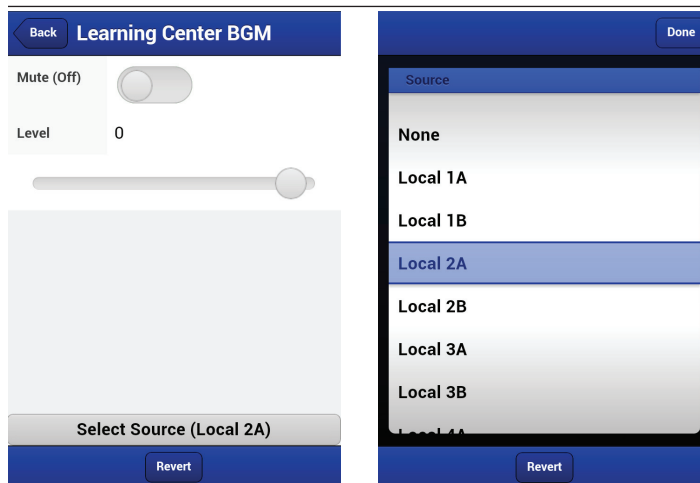

Mechanical/Electrical Features

- Low-power processor for high reliability and long life with minimal cooling requirements
- Storage is on solid state drive for higher performance and reliability than rotating media drives
- Powered from the included IED1112PSD 12V DC power supply module or the IED1112PS rack mount redundant power supply unit
- Fits into one (1) RU of 19" rack space

Specifications

Electrical

Supply Voltage.....12 VDC
Rated Input Current 2 Amps Max (24 W)

Mechanical

Height.....1.75", 1 rack unit (4.4 cm)
Width (without rack mount ears) 17" (43.2 cm)
Depth..... 12.25" (31.1 cm)
Recommended Mounting Depth 18" (45.7 cm)
Weight 10.85 lb (4.92 kg)

Environmental

Operating Temperature Range +32 °F – +95 °F (0 °C – +35 °C)
Storage Temperature Range -4 °F – +158 °F (-20 °C – +70 °C)

Connectors

Power2-pin Phoenix, 3.81 mm spacing with locking screws
USB4 Rear / 1 Front
Ethernet Control (10/100/1000 Mbps)
Video (2) VGA / HDMI
Audio In/Out (2) (not used) 1/8" Stereo Jack



1100DCI Rear View


Compliance

Safety

UL60950-1 (Ed.2) Listed
CAN/CSA C22.2 No. 60950-1-07 (Ed.2) Certified
IEC 60950-1: 2005; AM 1:2009
EN 60950-1:2—6/A11:2009/A1:2010
CB Certificate

FCC / EMC

CFR, Title 47, Chapter I, Part 15 Subpart B
ICES-003, Issue 4, 2004
AS/NZS CISPR 22: 2005
CISPR 22 (Ed.5): 2005 +A1 (EN 55022: 2006 +A1)
CISPR 24 (Ed.1): 1997 +A1, A2 (EN 55024:1998 +A1, +A2)
IEC 61000-3-2 (Ed.3): 2005, +A1,A2 (EN 61000-3-2:2006)
IEC 61000-3-3 (Ed.2): 2008 (EN 61000-3-3:1995 +A1, +A2)

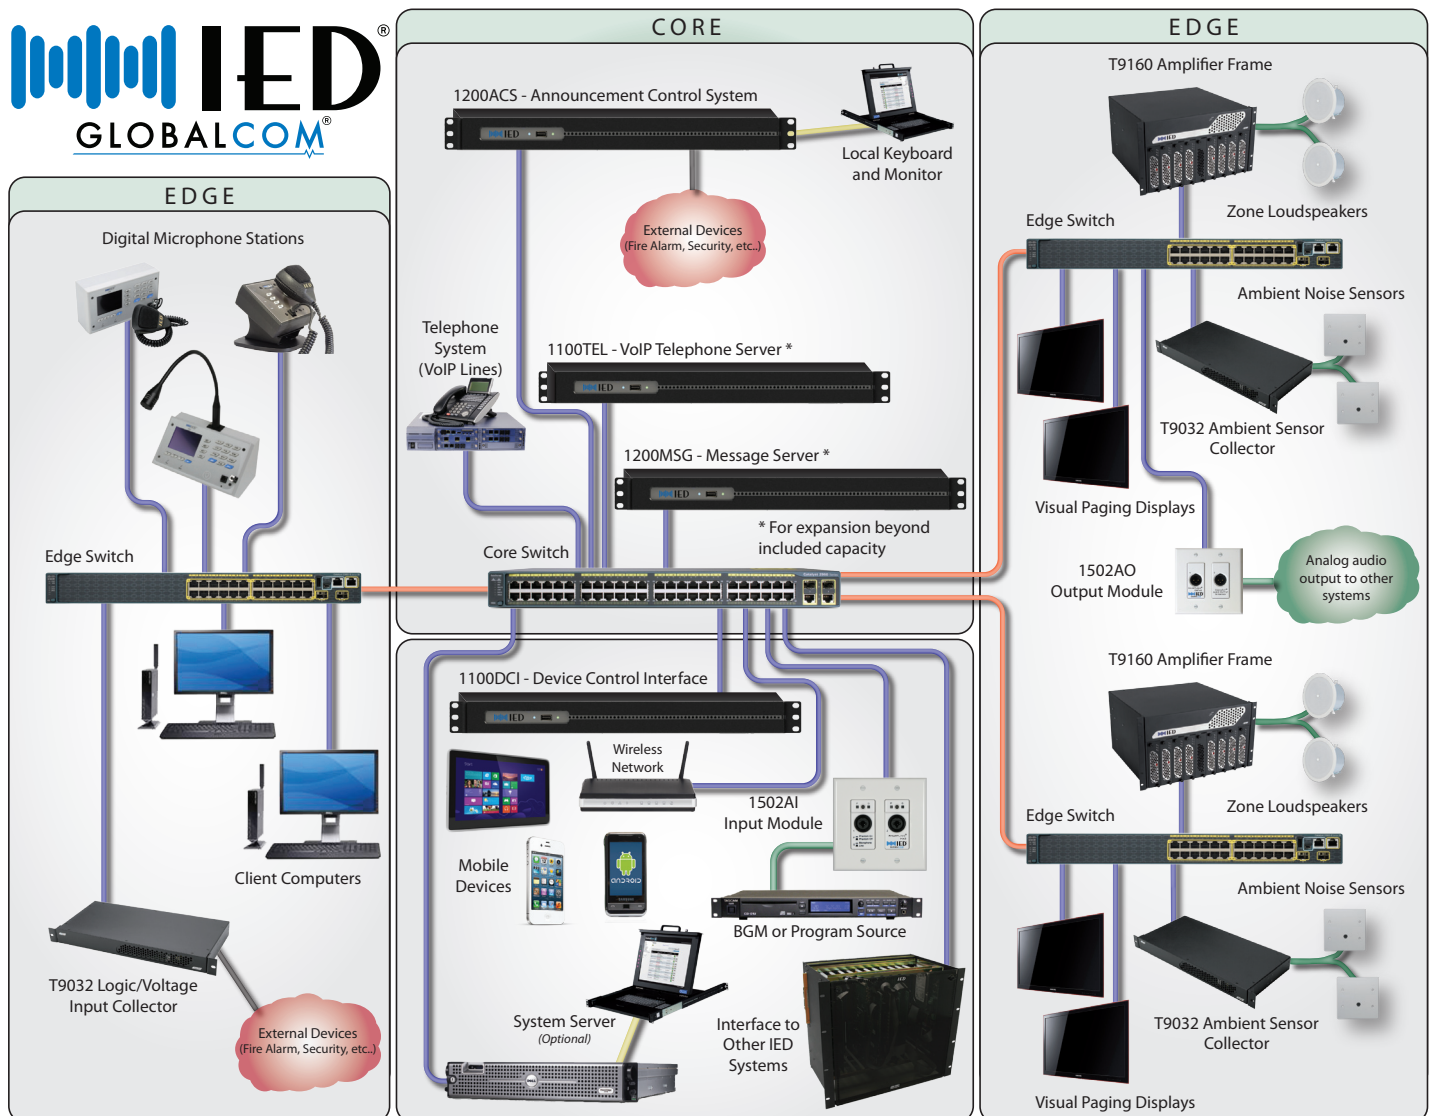

Innovative Electronic Designs, LLC
9701 Taylorsville Road
Louisville, KY 40299, USA

+1.502.267.7436 phone
+1.502.267.9070 fax
www.iedaudio.com



© Innovative Electronic Designs LLC. All Rights Reserved. IED, 500ACS, and 500ACS Announcement Control System are Registered Trademarks of Innovative Electronic Designs LLC. Atlas Sound is a Registered Trademark of Atlas Sound L.P. CobraNet is a trademark of Cirrus Logic. Dante is a trademark of Audinate Pty Ltd. All other trademarks are the property of their respective owners and no endorsement is implied. Due to continual product development, specifications are subject to change without notice.